



Portable Power

# BL 2000 | Balloon light



Balloon light	BL 2000
<b>GENERAL INFORMATION</b>	
Power	2000 W
Lamp type	Halogen
Package dimension	95x35x33 cm
Balloon weight	10 kg
Envelope diameter	110 cm
<b>LIGHTING</b>	
Lighted area	1400 m <sup>2</sup>
Light under the balloon	300 lux
Maximum Lumen	54 000 Lm
<b>ELECTRICAL</b>	
Frequency	50 Hz
Voltage	230 V (110 V UK option)
Number of lamps	4
Power cables	3G1.5
Protection (fuse)	10 A
Lamp holder type	R7 s (4x500 W)
Cable	6 m
<b>SAFETY</b>	
Wind speed resistance	100 km/h
Noise level	60 dBA
Global protection rating	IP 54
Internal pressure (air)	3 mbar
Infl ation time	45 s
Operating temperature	-20 / +40°C
Power consumption	3 kW
Required generator	3.5 kVA
Assembly time	< 10 min
Plug power supply	Schuko (UK option)
Telescopic rod height (option)	5 m



### Robust

- Strong balloon envelope
- Resistant to environment (insects, rain, etc) - IP54
- Wind speed resistance of 100 km/h.



### Convenient

- Easy to carry (10 kg) - packs into a small bag
- Self-infl ates with air in 45s for instant illumination
- One man installation job - set up time less than 10 min.





### Versatile

- Mounts onto any piece of equipment or can stand alone
- Light can move with the job - increases productivity.



### Innovative protective bowl

- Protects the lamps
- Few electrical components in the balloon.

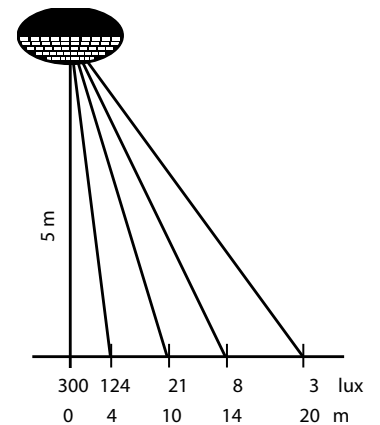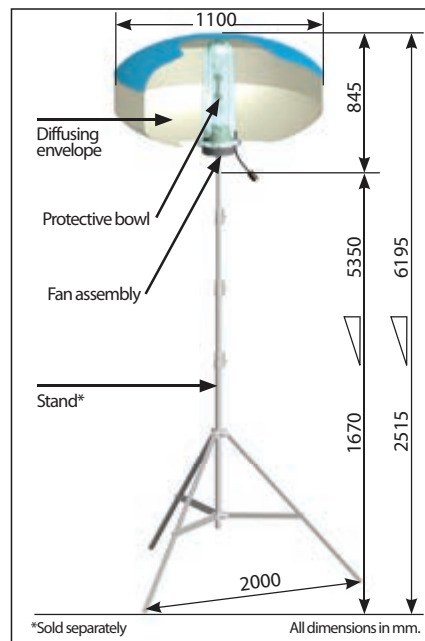

### Comfort / Safety

- Glare free light - can be looked at without being dazzled
- Very limited shadow
- 360° area covered - 1400 m<sup>2</sup>
- High-diffusion coverage for a group of workers.

[www.doosanportablepower.com](http://www.doosanportablepower.com)



**Portable Power**

Specifications and design are subject to change without notice. Pictures of Doosan Portable Power products may show other than standard equipment.

